



SOLTEC



MAGIC CLASSIC & KAL TEMP

Flexible LVT product

Essential information

0,55

mm

wear layer

2,50

mm

total
thickness

6

dB

acoustical
insulation

V4

bevel

4500

gr

weight
per sqm

Bfl-S1

reaction
to fire


23|33|42

classification



structured

The colours

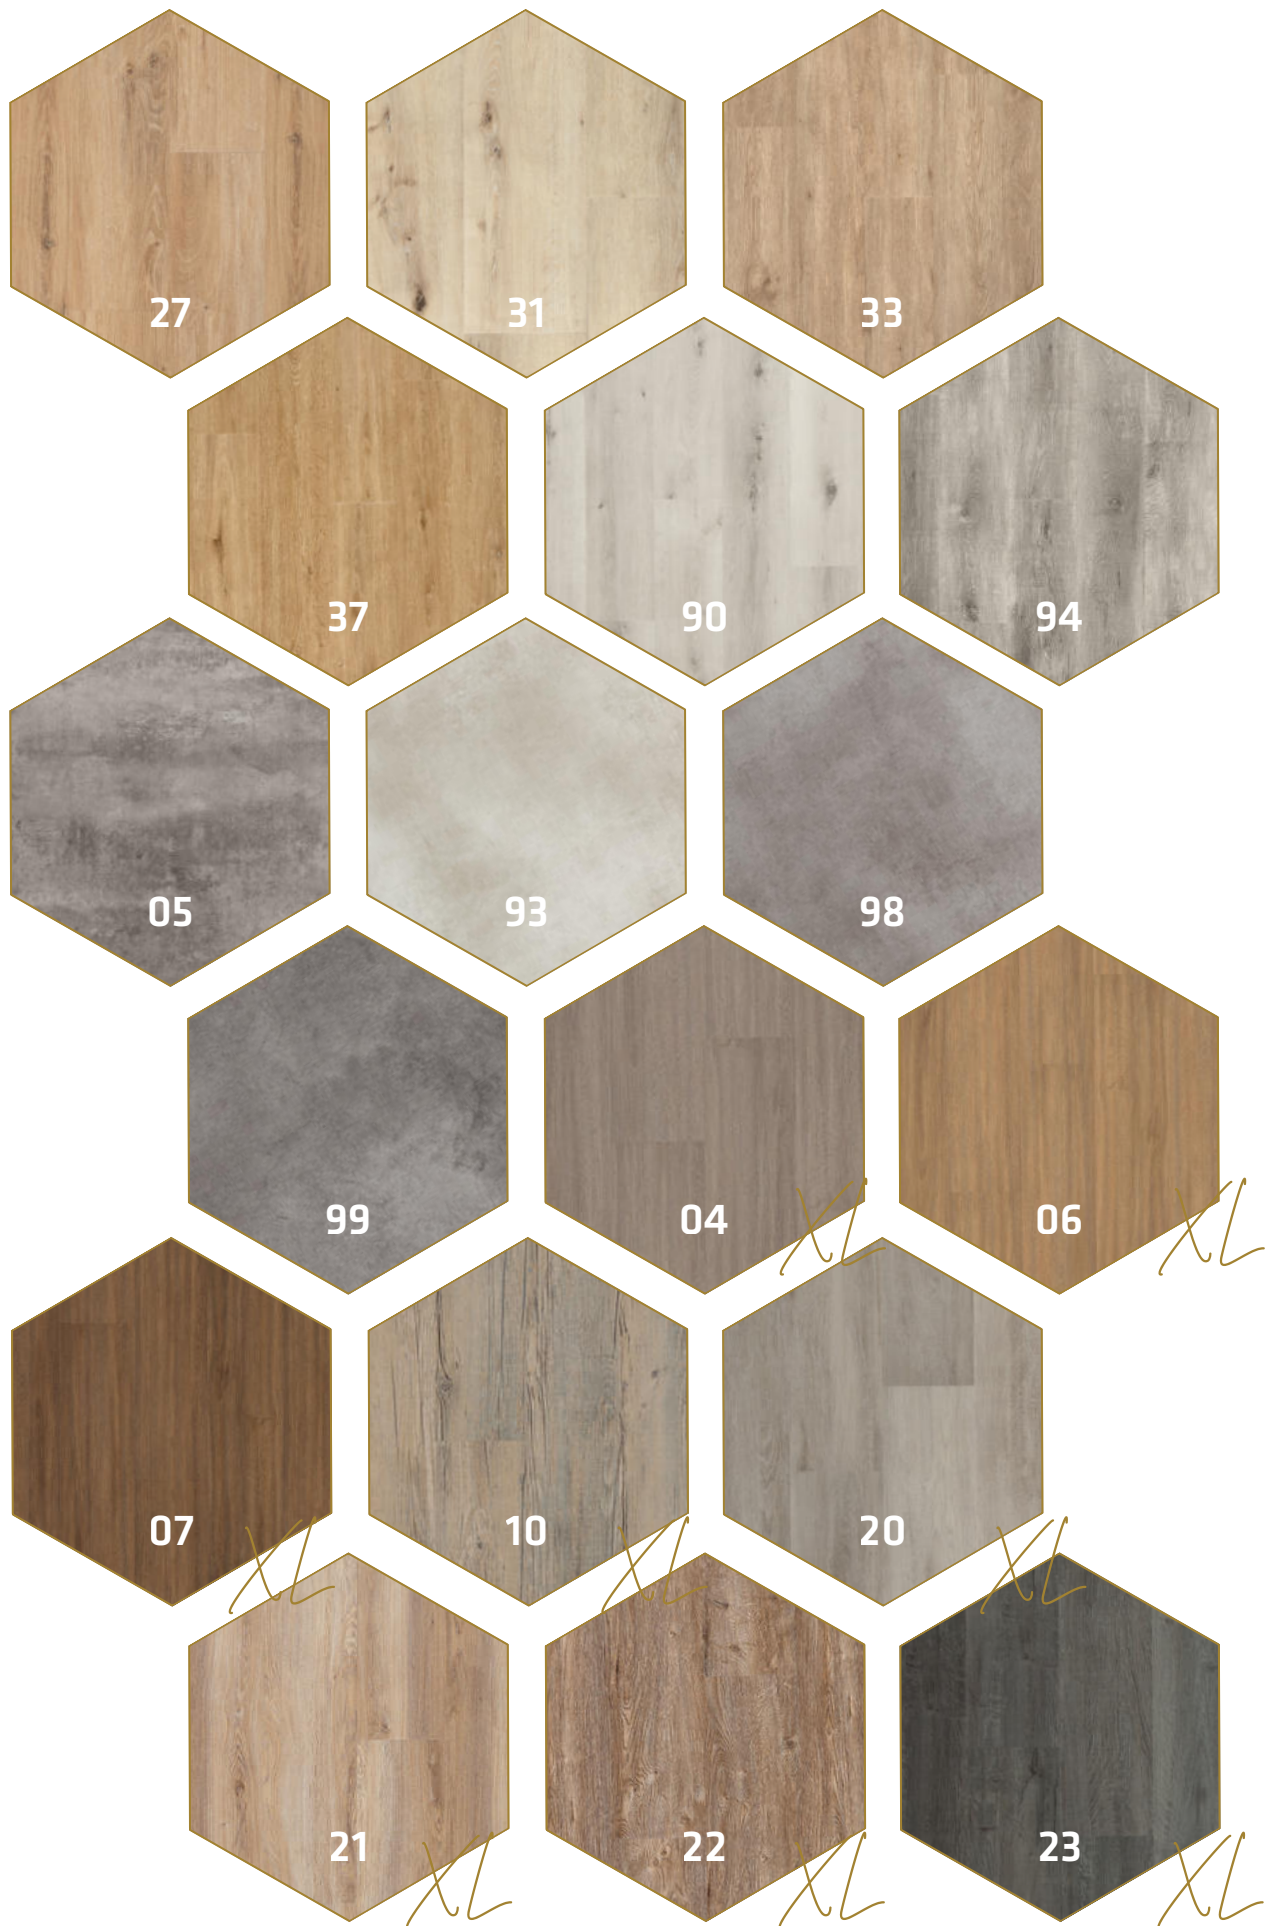

Our commitments



*25% recycled materials,
100% recyclable
production using 30% renewable energy*

Contact Us



Benoît DERAEDT

Chief Executive Officer &
Sales Europe & global
0032 493 52 98 58
benoit@soltec.be

Gilles DECOUTER

Internal sales
0032 56 92 19 92
gilles@soltec.be



Nele VERKEST

Finance & Administration Manager
0032 56 92 19 91
nele@soltec.be

GENERAL CONTACT DETAILS

Kortrijkstraat 19/0001
B-8580 Avelgem
BELGIUM



”

Thanks to our expertise in sourcing, logistics, and modern stock management – and with a central warehouse of over 250,000 m² in Belgium – we're always ready to serve customers across Europe and worldwide with unmatched speed.

Technical data sheet

Specification	Norm	Value MAGIC CLASSIC	Value KAL TEMP
Classification	EN ISO 10874	23 33 42	23 33 42
Dimensions	EN ISO 24342	18,70 x 122,73 cm (planks) 45,52 x 91,24 cm (tiles)	22,86 x 121,92 cm (planks)
Box content		20 planks 10 tiles	12 planks
Surface pro box		4,59 sqm (planks) 4,15 sqm (tiles)	3,34 sqm (planks)
Total thickness	EN ISO 24346	2,50 mm	2,50 mm
Thickness of wear layer	EN ISO 24340	0,55 mm	0,55 mm
Total weight	EN ISO 23997	4500 gr/sqm	4500 gr/sqm
Surface protection		Polyurethane (PU)	Polyurethane (PU)
Embossing		Structured	Structured
Bevelled edges		V4	V4
Installation method		Gluedown	Gluedown
Dimensional stability	EN ISO 23999	≤ 0,17 %	≤ 0,17 %
Residual indentation	EN ISO 24341-1	≤ 0,10 mm	≤ 0,10 mm
Acoustical impact noise reduction	EN ISO 717-2	6 dB	6 dB
Light stability	EN ISO 105-B02	6 - 7	6 - 7
Resistance to household chemicals		OK	OK
Slipresistance	EN 13893 DIN 51130	≥ 0,30 R10	≥ 0,30 R10
Underfloor heating suitable	EN ISO 12524	OK max 30 °C	OK max 30 °C
Reaction to fire	EN ISO 13501-1	Bfl-S1	Bfl-S1
Use of solar energy		30 %	30 %
Re-use of water		30 %	30 %