



# SOLTEC



## MAGIC CLASSIC & KAL TEMP

Flexible LVT product

# Essential information

**0,55**

mm  
wear layer

**2,50**

mm  
total  
thickness

**6**

dB  
acoustical  
insulation

**V4**

bevel

**4500**

gr  
weight  
per sqm

**Bfl-S1**

reaction  
to fire


**23|33|42**

classification



structured

# The colours

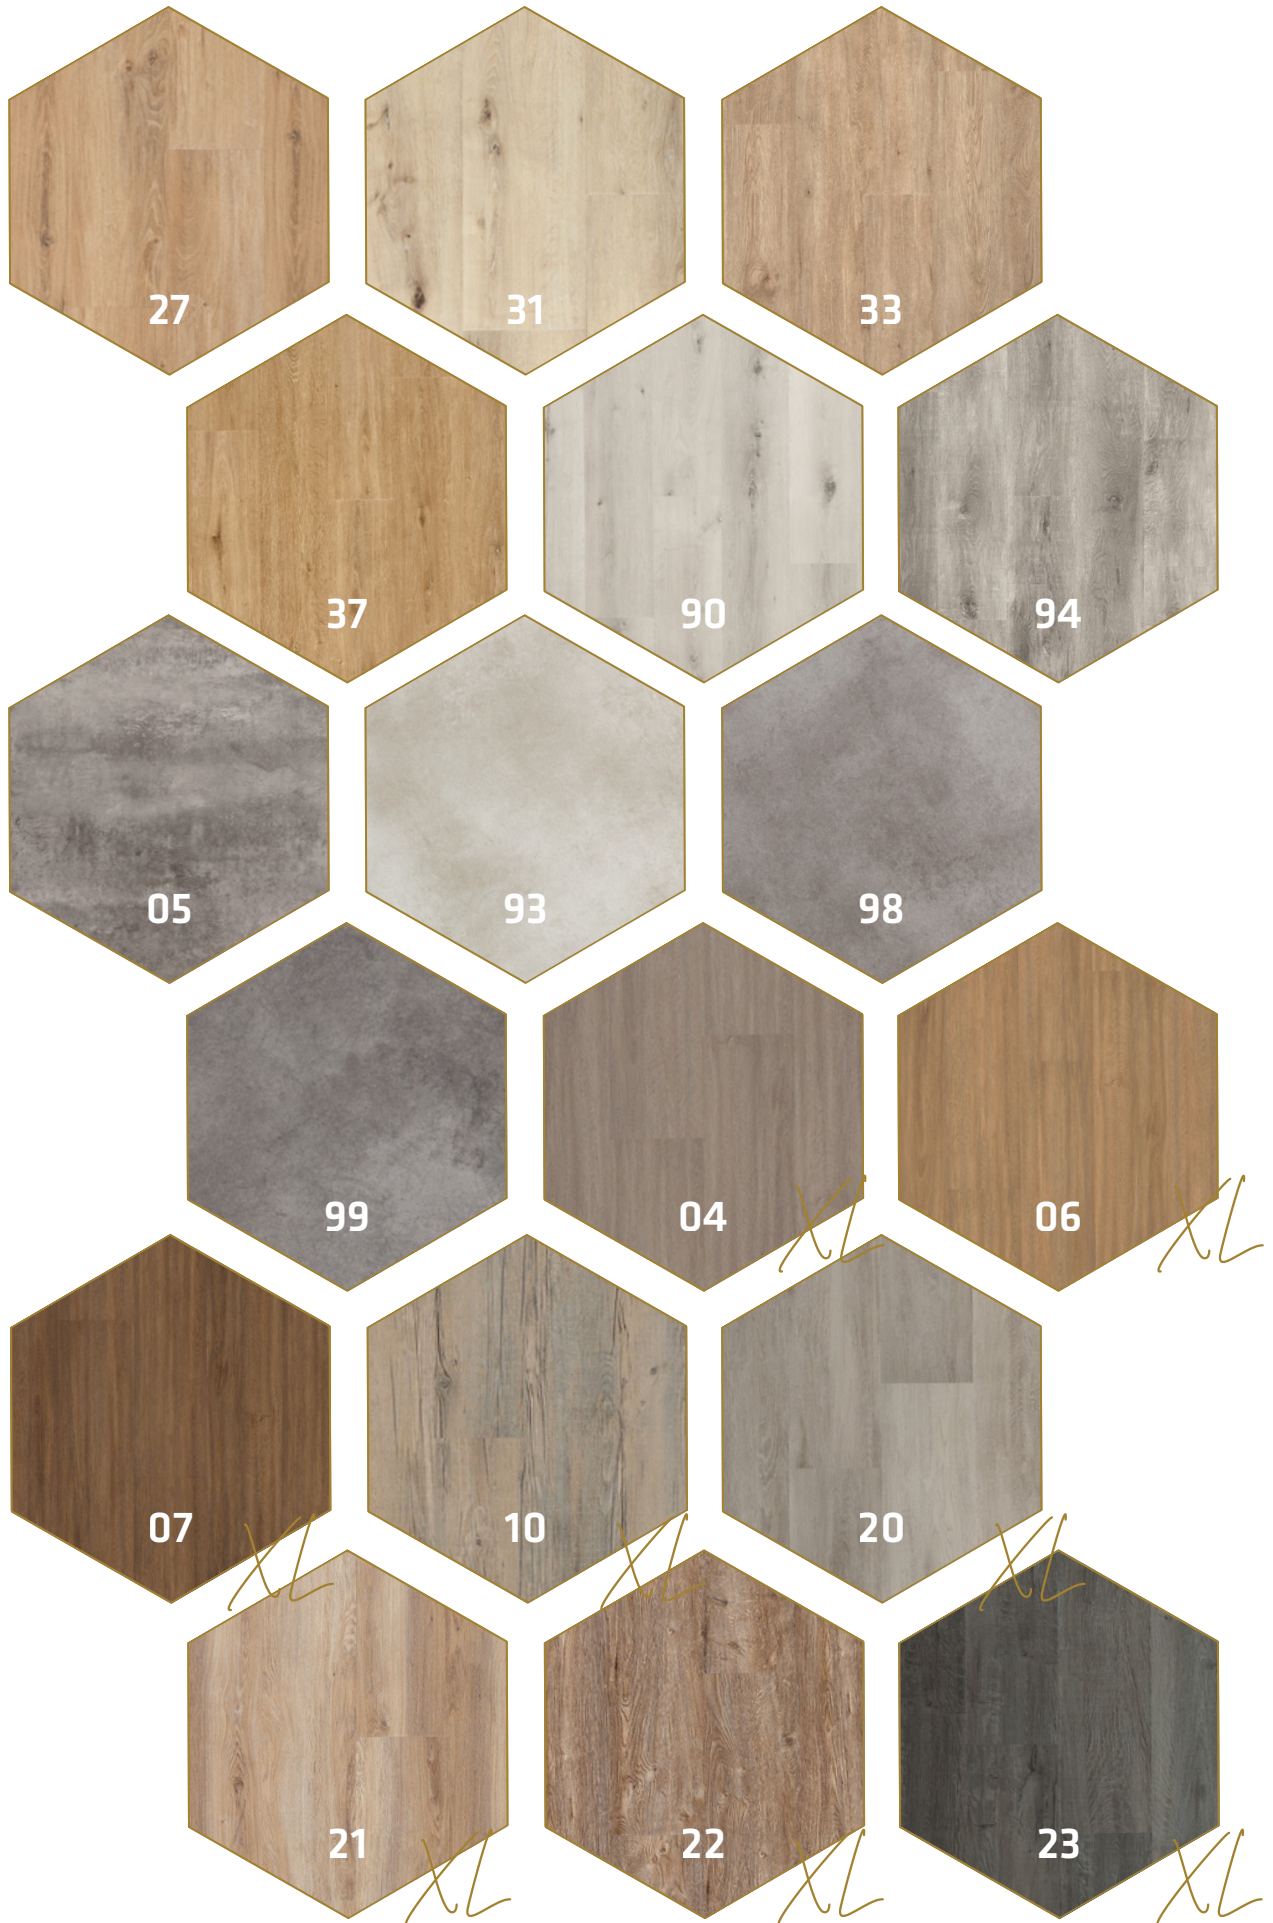

# Our commitments



*25% recycled materials,  
100% recyclable  
production using 30% renewable energy*

# Contact Us



**Benoît DERAEDT**

Chief Executive Officer &  
Sales Europe & global

0032 493 52 98 58

benoit@soltec.be

**Laura SLOS**

Internal sales

0032 56 92 19 90

laura@soltec.be



**Nele VERKEST**

Finance & Administration Manager

0032 56 92 19 91

nele@soltec.be

**GENERAL CONTACT DETAILS**

Kortrijkstraat 19/0001

B-8580 Avelgem

BELGIUM



*Thanks to our expertise in sourcing, logistics, and modern stock management – and with a central warehouse of over 250,000 m<sup>2</sup> in Belgium – we're always ready to serve customers across Europe and worldwide with unmatched speed.*

# Technical data sheet

Specification	Norm	Value MAGIC CLASSIC	Value KAL TEMP
Classification	EN ISO 10874	23   33   42	23   33   42
Dimensions	EN ISO 24342	18,70 x 122,73 cm (planks) 45,52 x 91,24 cm (tiles)	22,86 x 121,92 cm (planks)
Box content		20 planks 10 tiles	12 planks
Surface pro box		4,59 sqm (planks) 4,15 sqm (tiles)	3,34 sqm (planks)
Total thickness	EN ISO 24346	2,50 mm	2,50 mm
Thickness of wear layer	EN ISO 24340	0,55 mm	0,55 mm
Total weight	EN ISO 23997	4500 gr/sqm	4500 gr/sqm
Surface protection		Polyurethane (PU)	Polyurethane (PU)
Embossing		Structured	Structured
Bevelled edges		V4	V4
Installation method		Gluedown	Gluedown
Dimensional stability	EN ISO 23999	≤ 0,17 %	≤ 0,17 %
Residual indentation	EN ISO 24341-1	≤ 0,10 mm	≤ 0,10 mm
Acoustical impact noise reduction	EN ISO 717-2	6 dB	6 dB
Light stability	EN ISO 105-B02	6 - 7	6 - 7
Resistance to household chemicals		OK	OK
Slipresistance	EN 13893 DIN 51130	≥ 0,30 R10	≥ 0,30 R10
Underfloor heating suitable	EN ISO 12524	OK max 30 °C	OK max 30 °C
Reaction to fire	EN ISO 13501-1	Bfl-S1	Bfl-S1
Use of solar energy		30 %	30 %
Re-use of water		30 %	30 %