

SOLTEC



SOLTEC

Engineered SPC with integrated cork underlay

Essential information

0,55

mm
wear
layer

1,50

mm
integrated cork
underlayer

7,00

mm
total
thickness



vertical
drop lock

19

dB
acoustical
insulation

11400 gr

weight pro sqm

Bfl-S1

reaction
to fire

23|33|42

classification

V4

painted
bevels



EIR



*Find out all about our collection on
the product page!*

The colours




The colours

” Soltec elevates every step through an engineered core and ecological cork underlay, bringing nature-minded luxury to life across timeless décors: standard planks, grand XL planks, and elegant stone patterns.



XL

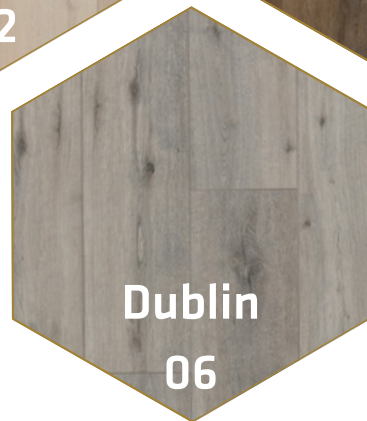

Our commitments



*25% recycled materials,
100% recyclable
production using 30% renewable energy*

Contact Us



Benoît DERAEDT

Chief Executive Officer &
Sales Europe & global

0032 493 52 98 58

benoit@soltec.be

Laura SLOS

Internal sales

0032 56 92 19 90

laura@soltec.be



Nele VERKEST

Finance & Administration Manager

0032 56 92 19 91

nele@soltec.be

GENERAL CONTACT DETAILS

Kortrijkstraat 19/0001

B-8580 Avelgem


BELGIUM



Thanks to our expertise in sourcing, logistics, and modern stock management – and with a central warehouse of over 250,000 m² in Belgium – we're always ready to serve customers across Europe and worldwide with unmatched speed.

Technical data sheet

Specification	Norm	Value NATURAL	Value XL	Value STONE
Classification	EN ISO 10874	23 33 42	23 33 42	23 33 42
Dimensions	EN ISO 24342	18,00 x 122,00 cm	22,60 x 153,50 cm	46,00 x 60,50 cm
Box content		6 planks	4 planks	6 tiles
Surface pro box		1,32 sqm (planks)	1,39 sqm (planks)	1,67 sqm (tiles)
Total thickness	EN ISO 24346	7,00 mm (5,5 mm ABA + 1,5 mm cork)	7,00 mm (5,5 mm ABA + 1,5 mm cork)	7,00 mm (5,5 mm ABA + 1,5 mm cork)
Thickness of wear layer	EN ISO 24340	0,55 mm	0,55 mm	0,55 mm
Total weight	EN ISO 23997	11400 gr/sqm	11400 gr/sqm	11400 gr/sqm
Surface protection		Aluminium Oxide Coating	Aluminium Oxide Coating	Aluminium Oxide Coating
Embossing		EIR	EIR	EIR
Bevelled edges		V4 painted	V4 painted	V4 painted
Installation method		I4F vertical drop lock	I4F vertical drop lock	I4F vertical drop lock
Dimensional stability	EN ISO 23999	≤ 0,10 %	≤ 0,10 %	≤ 0,10 %
Residual indentation	EN ISO 24341-1	≤ 0,10 mm	≤ 0,10 mm	≤ 0,10 mm
Acoustical impact noise reduction	EN ISO 717-2	19 dB	19 dB	19 dB
Light stability	EN ISO 105-B02	6/7	6/7	6/7
Resistance to household chemicals		OK	OK	OK
Slipresistance	EN 13893 DIN 51130	> 0,30 R10	> 0,30 R10	> 0,30 R10
Underfloor heating suitable	EN ISO 12524	OK max 30 °C	OK max 30 °C	OK max 30 °C
Reaction to fire	EN ISO 13501-1	Bfl-S1	Bfl-S1	Bfl-S1
Use of solar energy		30 %	30 %	30 %
Re-use of water		30 %	30 %	30 %



Check out the full technical specifications!