



SOLTEC




PORTO MARE

Essential information


Click

Rigid core SPC with integrated acoustical underlay

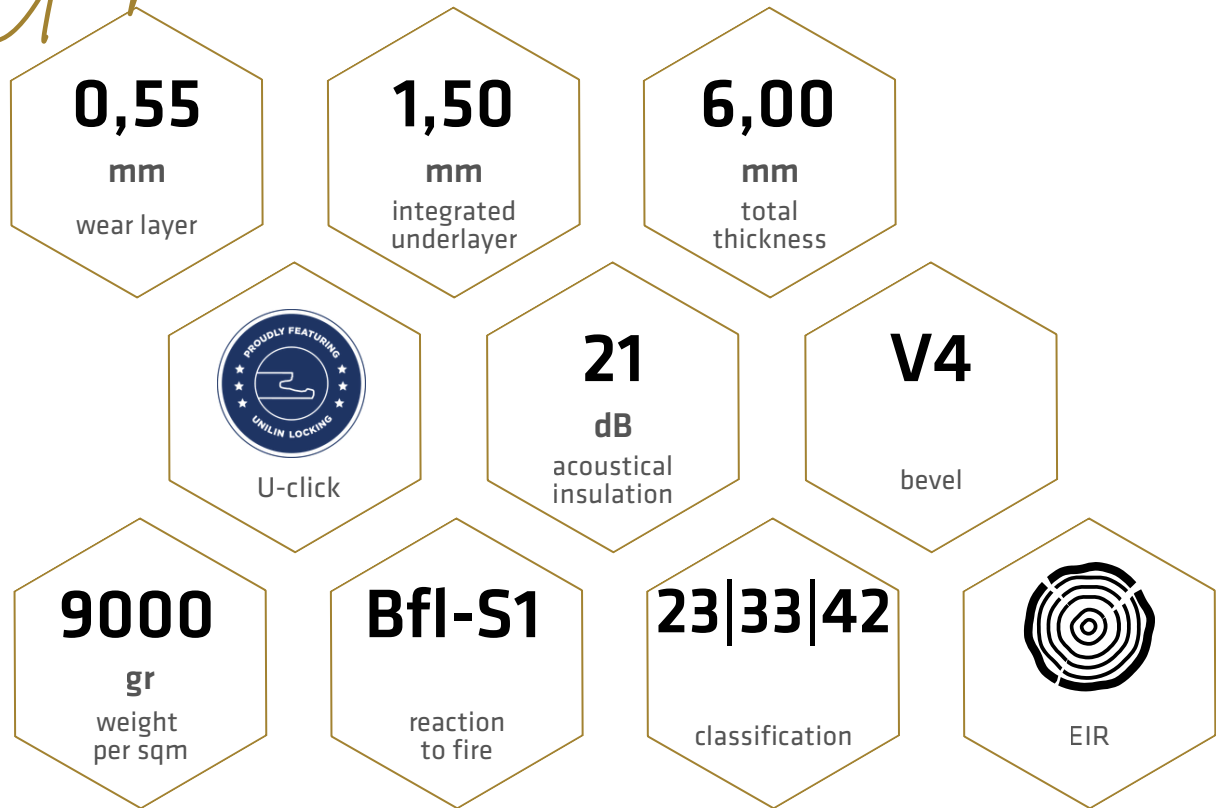

Dryback

LVT dryback

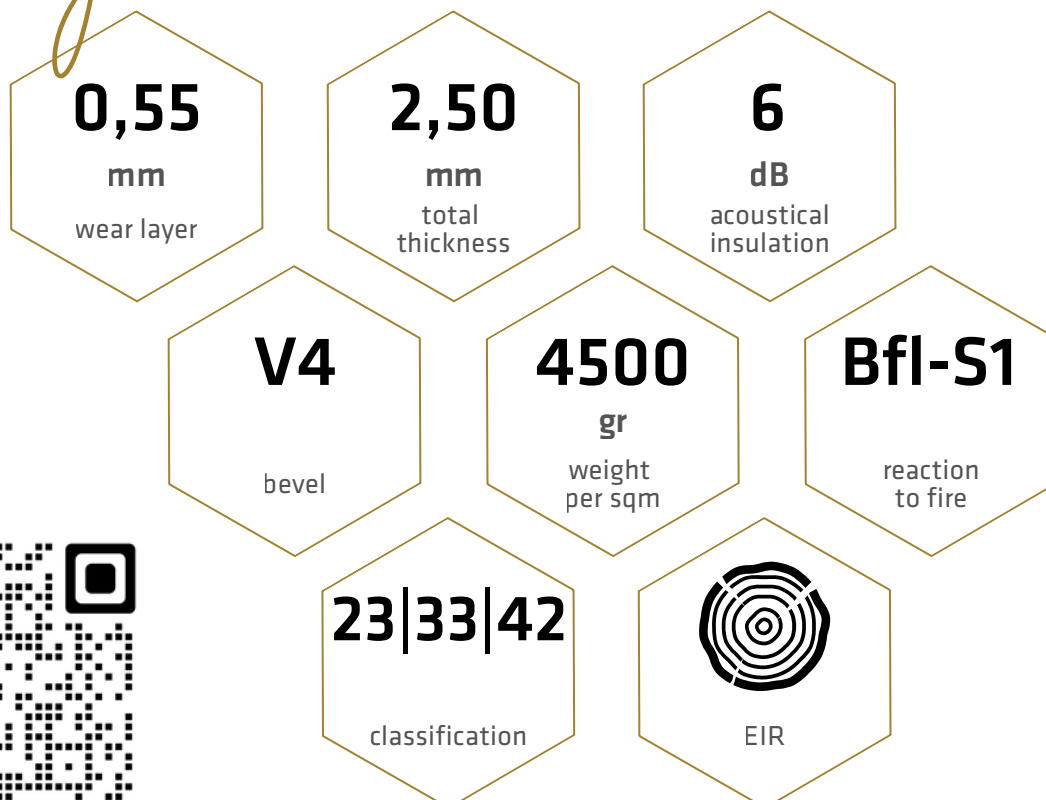

Find out all about our collection on the product page!

The colours



Where tradition meets innovation: Porto Mare brings the art of herringbone to life with five stunning décors and perfectly synchronized texture.



Our commitments



*25% recycled materials,
100% recyclable
production using 30% renewable energy*

Contact Us



Benoît DERAEDT

Chief Executive Officer &
Sales Europe & global
0032 493 52 98 58
benoit@soltec.be

Laura SLOS

Internal sales
0032 56 92 19 90
laura@soltec.be



Nele VERKEST

Finance & Administration Manager
0032 56 92 19 91
nele@soltec.be

GENERAL CONTACT DETAILS

Kortrijkstraat 19/0001
B-8580 Avelgem
BELGIUM



Thanks to our expertise in sourcing, logistics, and modern stock management – and with a central warehouse of over 250,000 m² in Belgium – we're always ready to serve customers across Europe and worldwide with unmatched speed.

Technical data sheet

Specification	Norm	Value CLICK	Value DRYBACK
Classification	EN ISO 10874	23 33 42	23 33 42
Dimensions	EN ISO 24342	12,20 x 61,00 cm	11,80 x 59,00 cm
Box content		18 planks	36 planks
Surface pro box		1,34 m ²	2,51 m ²
Total thickness	EN ISO 24346	6,00 mm (4,5 mm SPC + 1,5 mm IXPE)	2,50 mm
Thickness of wear layer	EN ISO 24340	0,55 mm	0,55 mm
Total weight	EN ISO 23997	9000 gr/sqm	4500 gr/sqm
Surface protection		Aluminium Oxide Coating	Aluminium Oxide Coating
Embossing		EIR	EIR
Bevelled edges		V4	V4
Installation method		Unilin U-click	Gluedown
Dimensional stability	EN ISO 23999	≤ 0,10 %	≤ 0,17 %
Residual indentation	EN ISO 24341-1	≤ 0,10 mm	≤ 0,10 mm
Acoustical impact noise reduction	EN ISO 717-2	21 dB	6 dB
Light stability	EN ISO 105-B02	6 - 7	6 - 7
Resistance to household chemicals		OK	OK
Slipresistance	EN 13893 DIN 51130	> 0,30 R10	> 0,30 R10
Underfloor heating suitable	EN ISO 12524	OK max 30 °C	OK max 30 °C
Reaction to fire	EN ISO 13501-1	Bfl-S1	Bfl-S1
Use of solar energy		30 %	30 %
Re-use of water		30 %	30 %

Check out the full technical specifications!



SOLTEC
Premium